8t MODULAR SPREADER BAR

DESCRIPTION

Maximum capacity	8.0 tonne at 60° included sling angle (at 2.5Mtrs span)
Tare weight:	55kg Fully Assembled (excl. shackles or rigging gear)
Lifting Lugs (top) suit:	6.5 tonne Grade 'S' safety bow shackle
Lifting Lugs (lower) suit:	4.7 tonne Grade 'S' safety bow shackle

LOAD CHART
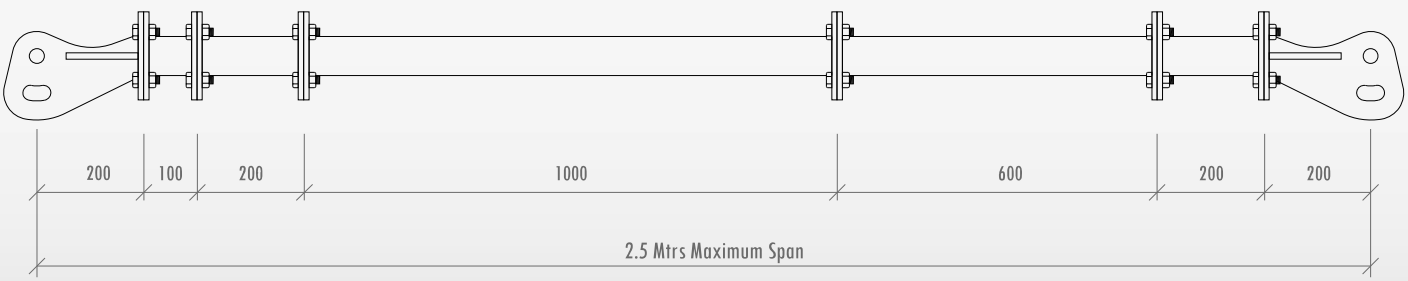
Span	WLL (tonnes)			Approx Sling Leg Length (Mtrs)			Approx Headroom (Mtrs)			Modules				
(Mtrs)	60°	90°	120°	60°	90°	120°	60°	90°	120°	END LUGS	0.1m	0.2m	0.6m	1.0m
0.5	8	7	5	0.5	0.3	0.3	0.4	0.3	0.1	2	1			
0.6	8	7	5	0.6	0.4	0.3	0.5	0.3	0.2	2		1		
0.7	8	7	5	0.7	0.5	0.4	0.6	0.4	0.2	2	1	1		
0.8	8	7	5	0.8	0.6	0.4	0.7	0.4	0.2	2		2		
0.9	8	7	5	0.9	0.6	0.5	0.8	0.5	0.3	2	1	2		
1.0	8	7	5	1.0	0.7	0.5	0.9	0.5	0.3	2			1	
1.1	8	7	4	1.1	0.8	0.6	1.0	0.6	0.3	2	1		1	
1.2	8	7	4	1.2	0.8	0.6	1.0	0.6	0.4	2		1	1	
1.3	8	7	4	1.3	0.9	0.7	1.1	0.7	0.4	2	1	1	1	
1.4	8	7	4	1.4	1.0	0.7	1.2	0.7	0.4	2				1
1.5	8	7	4	1.5	1.1	0.8	1.3	0.8	0.4	2	1			1
1.6	8	6	3	1.6	1.1	0.8	1.4	0.8	0.5	2		1		1
1.7	8	6	3	1.7	1.2	0.9	1.5	0.9	0.5	2	1	1		1
1.8	8	6	3	1.8	1.3	0.9	1.6	0.9	0.5	2		2		1
1.9	8	6	3	1.9	1.3	1.0	1.7	1.0	0.6	2	1	2		1
2.0	8	6	3	2.0	1.4	1.0	1.7	1.0	0.6	2			1	1
2.1	8	5	3	2.1	1.5	1.1	1.8	1.1	0.6	2	1		1	1
2.2	8	5	3	2.2	1.6	1.1	1.9	1.1	0.6	2		1	1	1
2.3	8	5	3	2.3	1.6	1.2	2.0	1.2	0.7	2	1	1	1	1
2.4	8	5	3	2.4	1.7	1.2	2.1	1.2	0.7	2		2	1	1
2.5	8	5	3	2.5	1.8	1.3	2.2	1.3	0.7	2	1	2	1	1