



Gunnebo

SUPER SHACKLES

Bow shackle with safety bolt

Gunnebo Super Shackles are available for hire from MG Lifting in all sizes from 12.St through to 40t WLL, these shackles feature a smaller pin diameter and are often the OEM specified shackle for construction equipment lifting points.

Unique benefits with the Super Shackle

In certain situations, a demand for extra Working Load Limit occurs, in others the lifting environment has limited space for the lifting application. Gunnebo Industries has added the Super Shackle to the range, enabling the same Working Load Limit on a 22 mm Super shackle as for a 28 mm Standard shackle.

The Super Shackle meets the US Federal Specification RR.C-271. It is a grade 8 shackle and has all parts hot dipped galvanised, including the safety bolt.






Split pin included

Art.no	WLL	Dim.	d Trade Size						Weight
			d1	mm	inch	a	c	d2	
	tonnes								kg
A085813	3.3	16	13		1/2"	21	51	33	0.4
A085816	5.0	19	16		5/8"	27	60	40	0.7
A085,819	7.0	22	19		3/4"	31	71	48	1.2
A085822	9.5	25	22		7/8"	37	84	52	1.7
A085825	12.5	28	25		1"	43	95	60	2.5
A085828	15.0	32	28		1 1/8"	46	108	64	3.4
A085832	18.0	35	32		1 1/4"	52	119	72	4.8
A085835	21.0	38	35		1 3/8"	57	132	76	7.0
A085838	30.0	42	38		1 1/2"	60	146	84	8.8
A085845	40.0	50	45		1 3/4"	74	178	105	15

Max load	Breakaway	Min material thickness	Dead weight	Dimensions
1,500kg (flat steel) 750kg (round steel)	5,000kg	5mm	69kg	354 x 168 x 172mm 21

Specifications

Standard:	U.S. Fed. Spec. RR.C-271 Type IVA Class 3, Grade B
Material:	High Tensile Steel. Quenched and Tempered, Grade 8
Finish:	All parts hot dip galvanized + brown color marking
Safety factor:	5:1
Documentation:	Test certificate and traceable 3.1 certificate
Temperature:	-20C to 200C

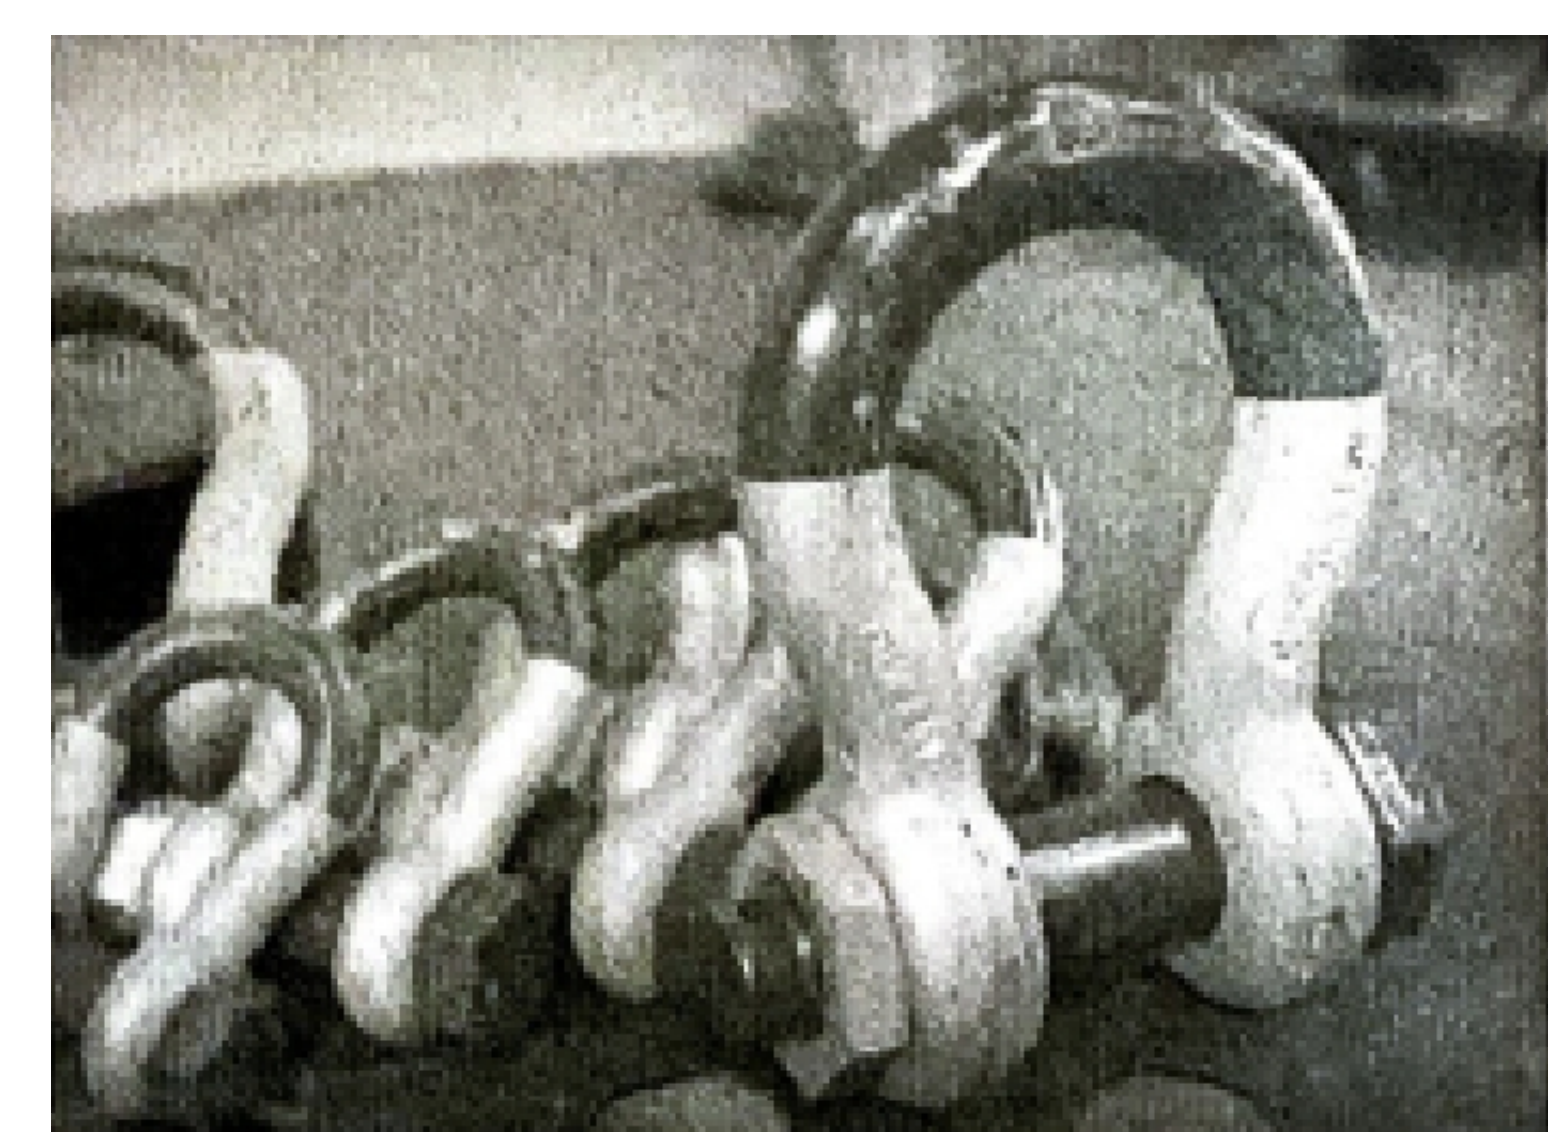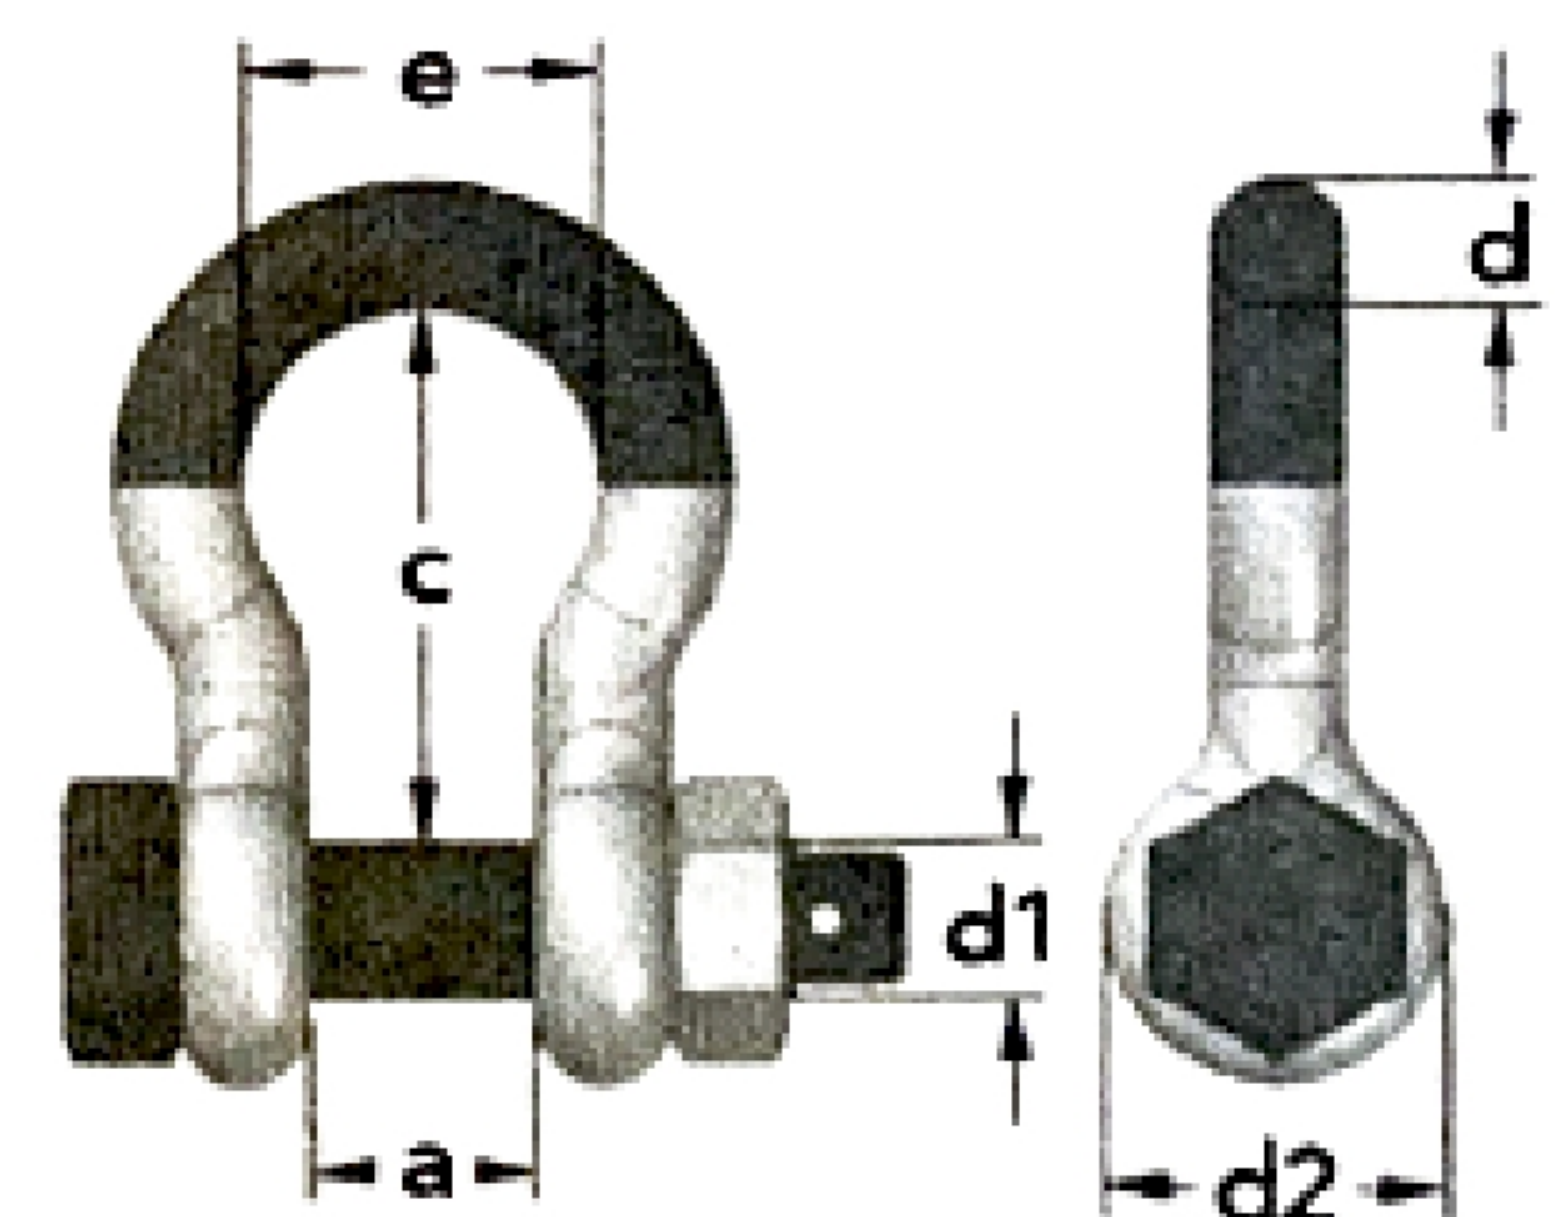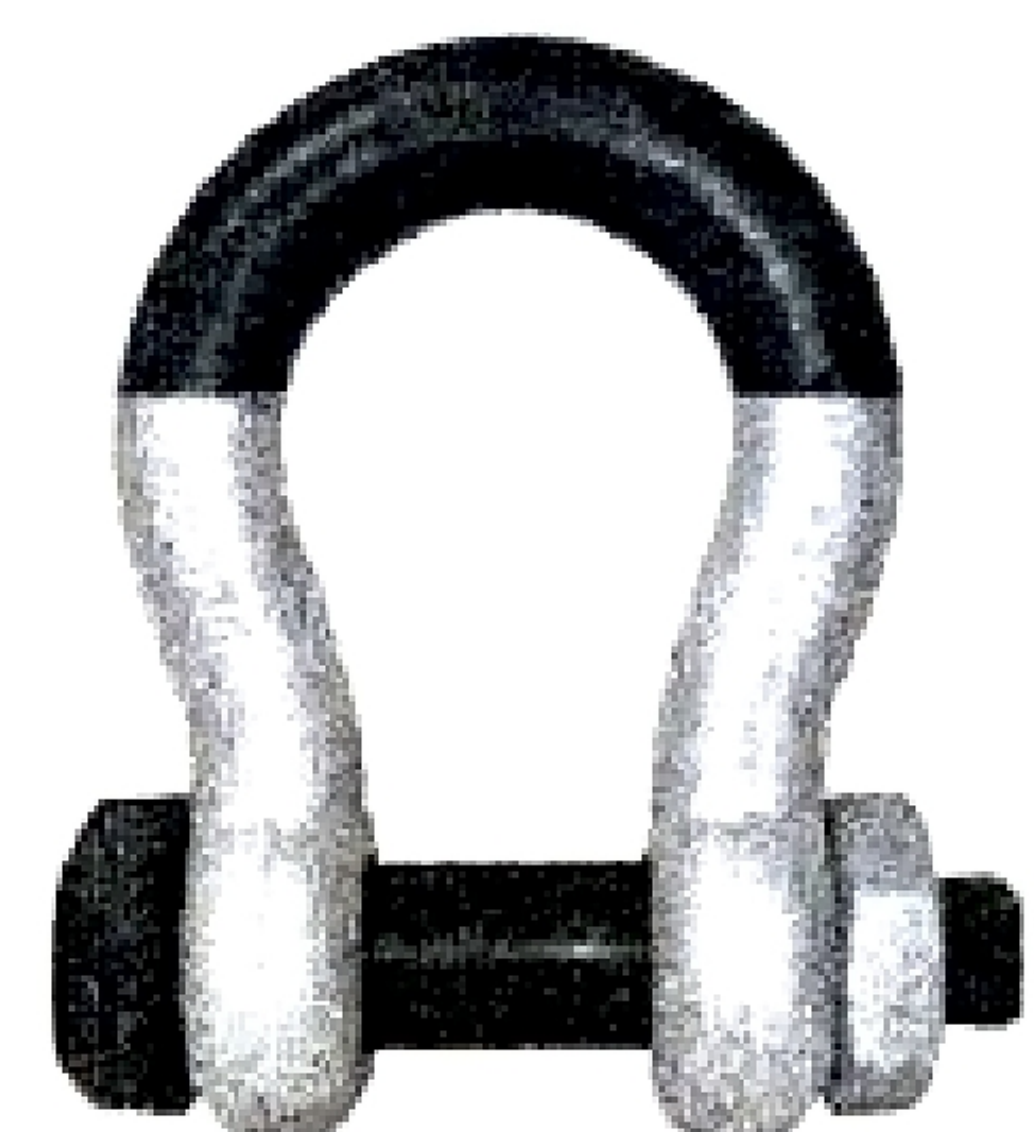

For enquiries or to make a booking, call our office on 0431 403 273



Green Pin

SUPER BOW SHACKLES

Technical specifications in milimeters

Article Code	Working load limit	Weight Shackle Pin	A diameter bow	B diameter pin	C diameter eye	D width eye	E width inside	F length inside	G width bow	H length	length bolt	J width	thickness nut	Net weight (kg)
SUGHMB45	40	4,92	45	50	104	45	74	178	126	300	243	216	23	14.8
SUGHMB57	55	6,95	57	57	119	57	83	197	138	342	283	252	26	23.3
SUGHMB70	85	12,2	70	70	145	70	105	260	180	438	339	320	32	45.1
SUGHMB83	120	21,1	83	83	164	83	127	329	190	537	397	356	39	72


For enquiries or to make a booking, call our office on 0431 403 273



SLING SHACKLES

Technical specifications in milimeters

WLL	Dia Body	Dia Pin	Dia Eye	Width Eye	Width Inside	Length Inside	Width Bow	Length	Length Bolt	Width	Nut	Bearing Surface	Weight
†	A	B	C	D	E	F	G	H	I	J	K	L	Kg.
18	35	35	69	30	54	148	102	239	171	180	29	64	6.85
30	40	42	90	35	69	165	126	279	207	200	34	79	12.5
40	55	51	109	45	84	199	140	331	252	235	38	97	20.3
55	60	57	115	55	90	240	160	389	294	270	45	100	30
75	68	70	126	54	110	290	185	473	317	331	40	120	49
125	85	80	154	85	137	366	220	583	426	390	64	150	92
150	94	95	179	89	147	391	253	645	435	434	50	170	140
200	110	105	199	100	158	481	280	759	470	482	50	205	205
250	126	120	227	110	179	542	300	859	519	530	60	240	264
300	136	134	246	134	195	601	350	946	590	620	70	265	360

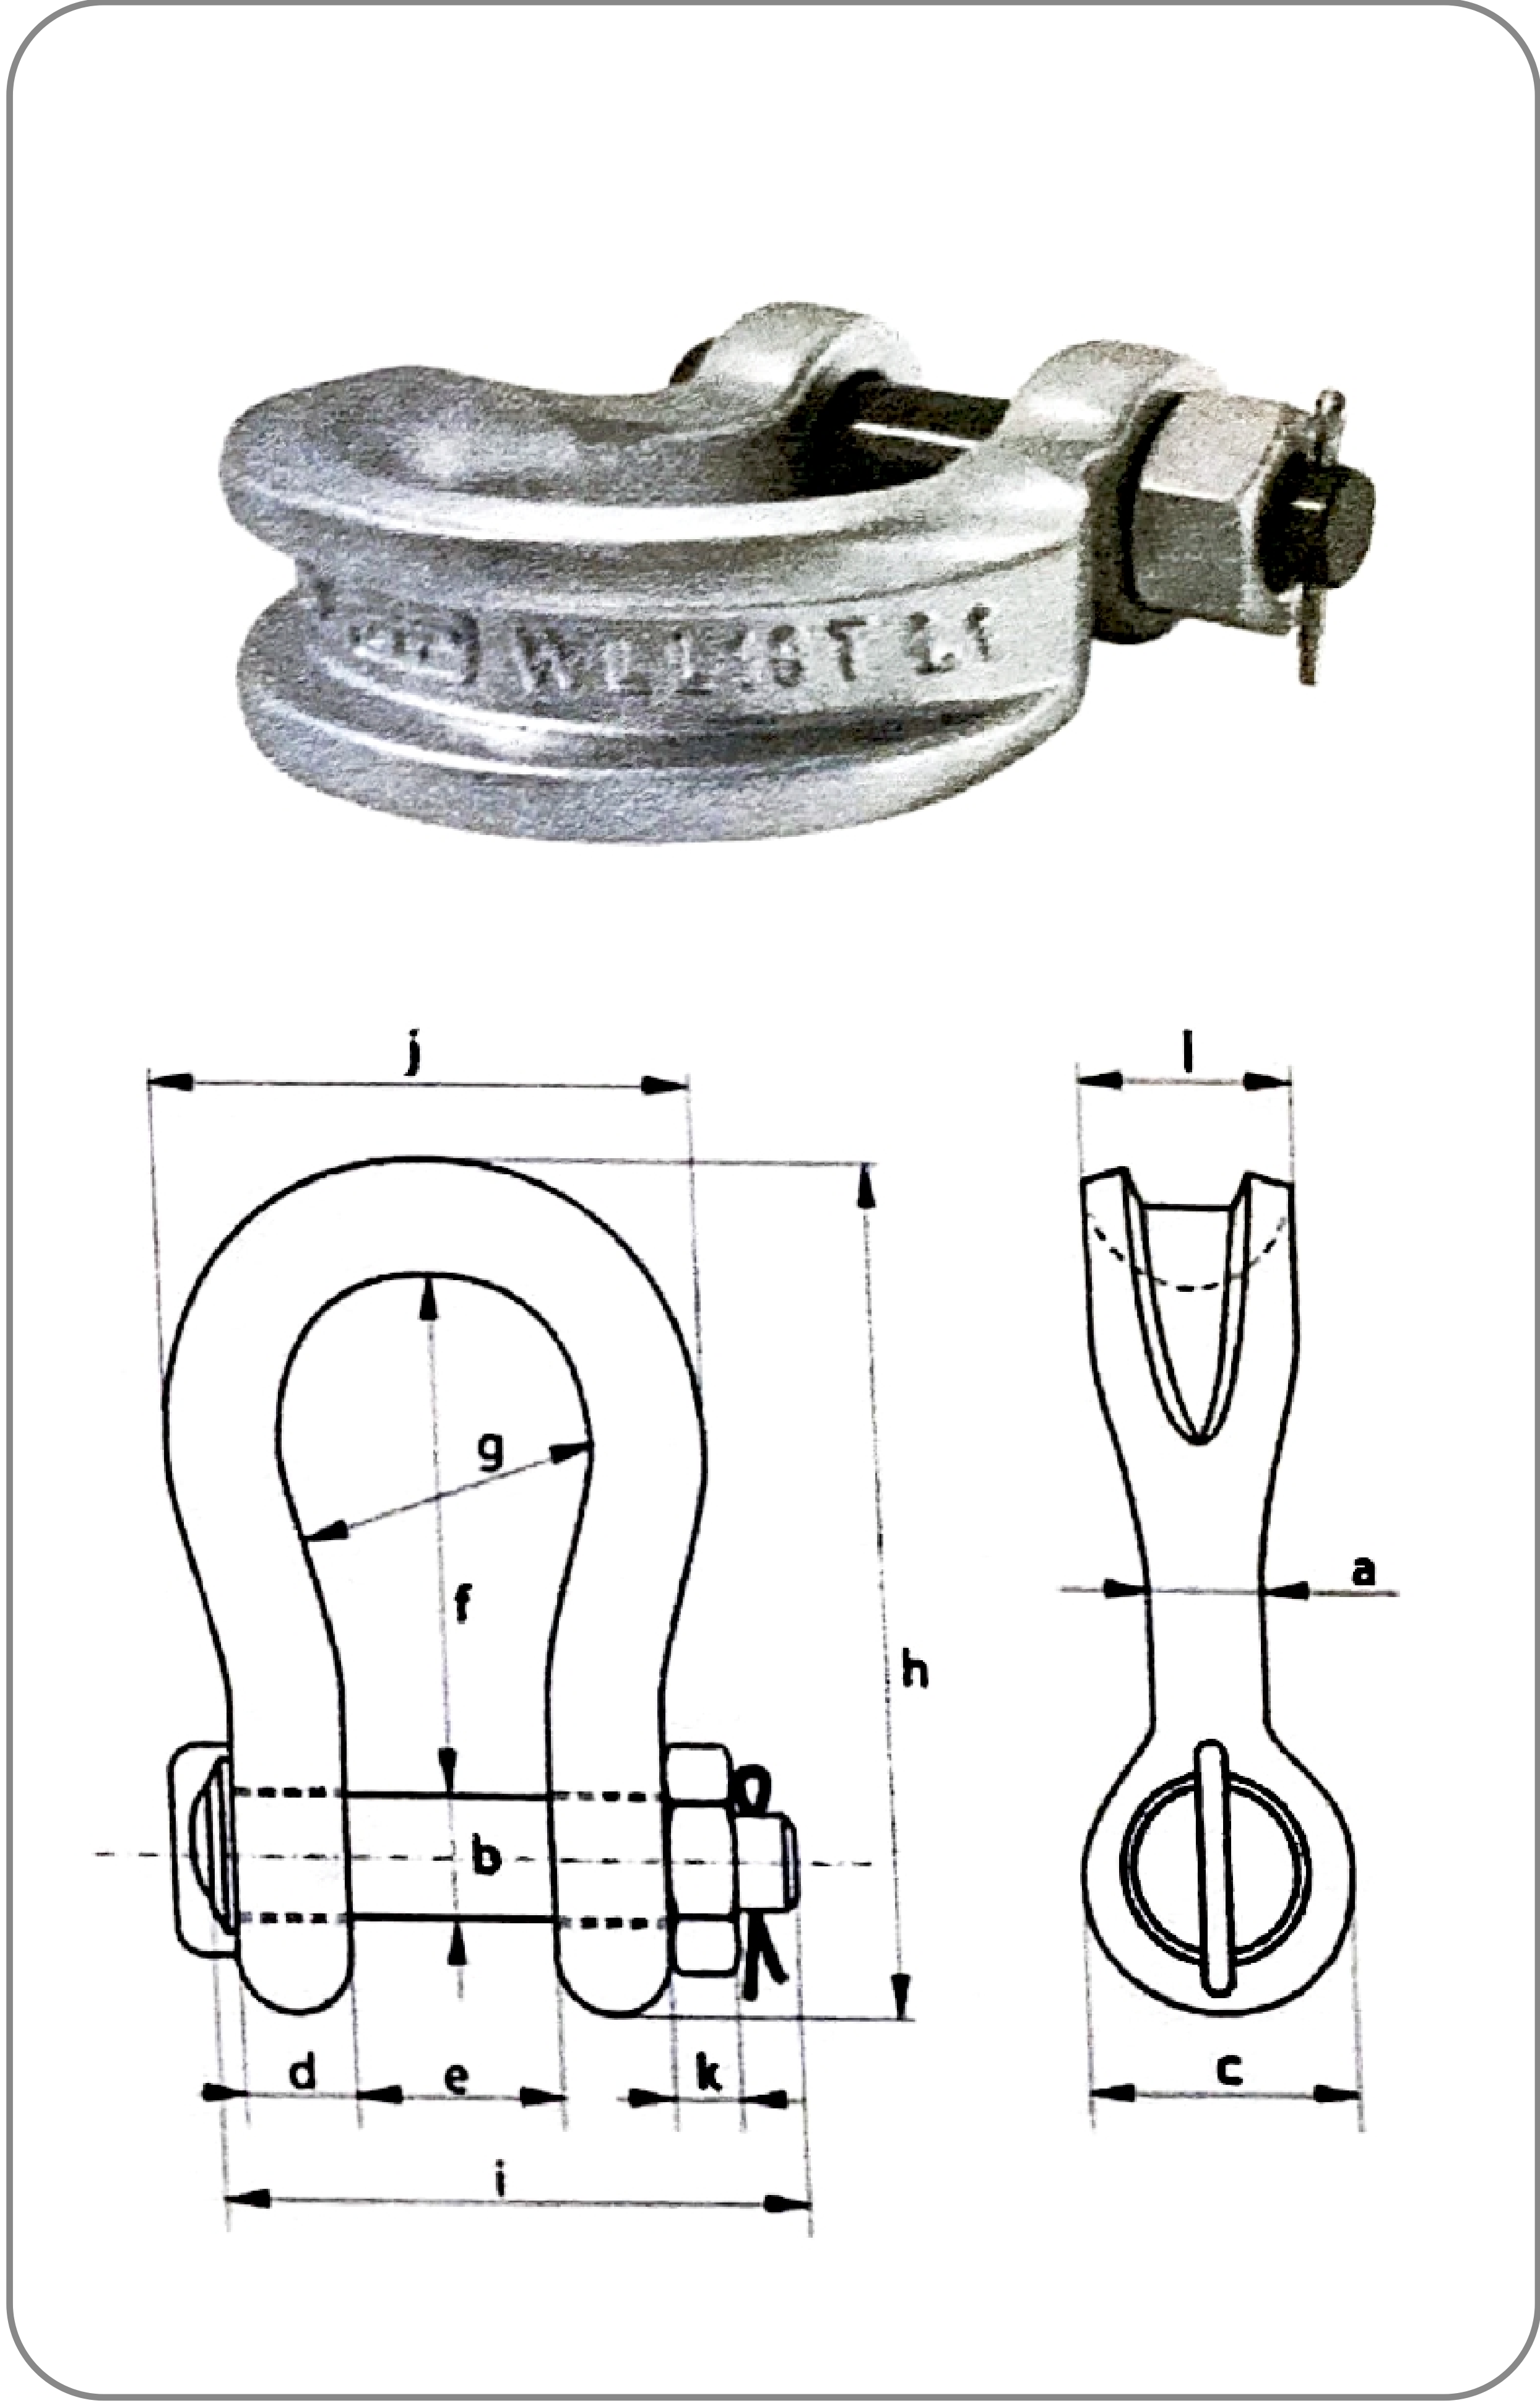


For enquiries or to make a booking, call our office on [0431 403 273](tel:0431403273)



SHACKLES SAFETY PIN

The most commonly use piece of rigging gear is the shackle, we stock the Van Beest brand exclusively and hold hundreds of shackles from the smallest 4.75 through to 150 tonne all with a 5:1 safety factor.

WLL	Dia Bow	Dia Pin	Dia Eye	Width Eye	Width Inside	Length Inside	Width Bow	Length	Length Bolt	Width	Nut	Weight
†	A	B	C	D	E	F	G	H	I	J	K	Kg.
4.75	19	22	46	19	31	76	51	129	114	89	19	1.18
6.5	22	25	52	22	36	83	58	144	130	102	22	1.77
8.5	25	28	59	25	43	95	68	164	150	118	25	2.58
12	32	35	72	32	51	115	83	201	178	147	30	4.91
13.5	35	38	80	35	57	133	92	227	197	162	33	4.91
17	38	42	88	38	60	146	99	249	202	175	19	8.19
25	45	50	103	45	74	178	126	300	249	216	23	14.22
35	50	57	116	50	83	197	138	334	269	238	26	19.85
42.5	57	65	130	57	95	222	160	377	301	274	29	28.33
55	65	70	145	65	105	260	180	433	330	310	32	39.59
85	75	83	162	73	127	329	190	527	380	340	40	62
120	95	95	215	89	144	381	238	667	440	416	50	110
150	105	108	245	100	165	400	275	702	490	485	60	160
200	120	130	270	120	179	513	290	833	564	530	71	252

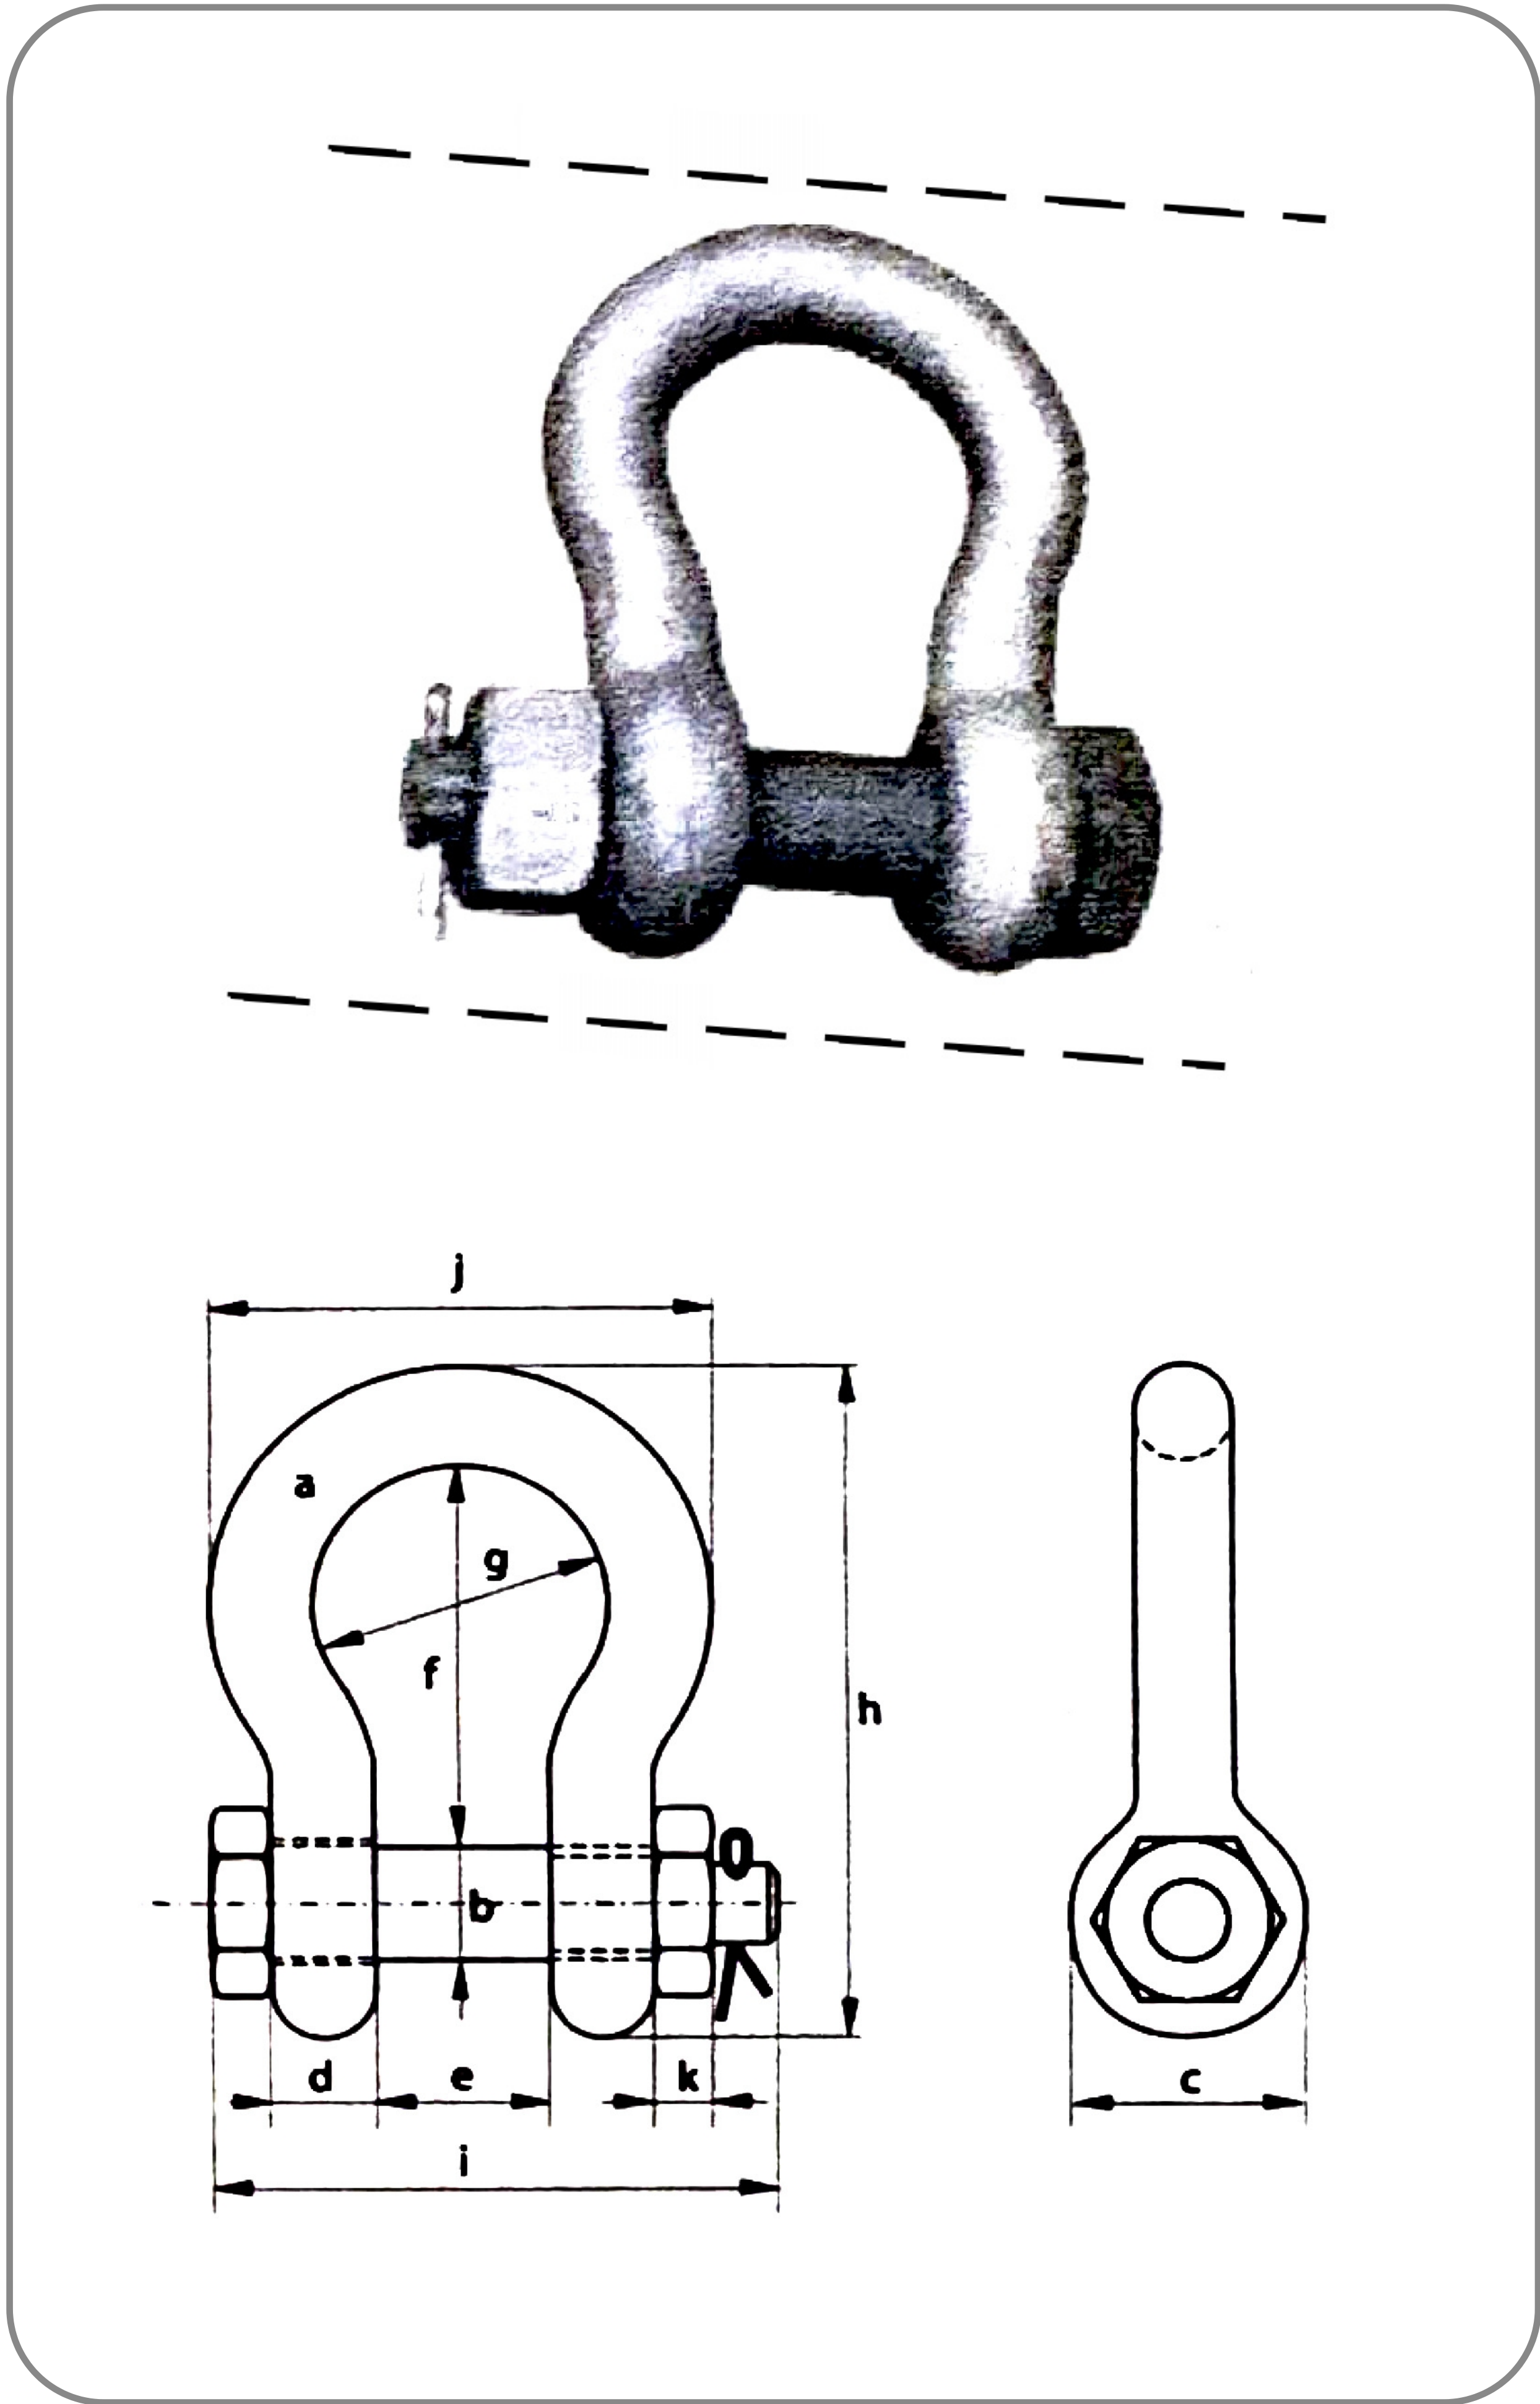

For enquiries or to make a booking, call our office on [0431 403 273](tel:0431403273)